


Table of content

	Page
Overview	2
CN 8100	4
Options	7
Accessories	8
Dimensions	9
Detailed Ex-markings	12
Electrical installation	13
Spare parts	14



Subject to change.

All dimensions in mm (inches).

All prices in Euro (€) or USD (\$),
excluding VAT.

All EURO prices are EXW Betzigau,
all USD prices are EXW Memphis,
excluding packaging costs.

Valid: From 01.01.2019 until 31.03.2020, unless otherwise
agreed.

By publishing this selection list all other lists become invalid.

We assume no liability for typing errors.

Different variations to those specified are possible.
Please contact our technical consultants.

Overview

- Level limit detection in liquids, slurries, foam, interfaces and solids
- Compact unit
- Wide range of applications
- No maintenance
- Full-, demand-, empty detector
- Extended pipe version or cable version
- High chemical resistance on probes
- Capacitive technology
- Level detection independent of tank wall/ pipe
- Sensitivity: dielectric constant ≥ 1.5

Standard electronics with:

- Universal power supply
- Solid-state switch and Relay output

Digital electronics with:

- Communication via PROFIBUS PA
- Integrated Local User Interface
- Self diagnostics

- Multiple approvals available
- 2011/65/EU RoHS conform

Approvals	CE		
	ATEX	Zone 0	Intrinsically Safe
		Zone 0/1	Flameproof
		Zone 2	Type of protection n
		Zone 20/21	Dust Ignition Proof
	FM/ CSA	General purp.	
		Cl. I Div. 1	Intrinsically Safe
		Cl. I Div. 1	Explosionproof
		Cl. I Div. 2	Non incensive
		Cl. II, III Div. 1	Dust Ignition Proof
	TR-CU	Ordinary Locations, Intrinsically Safe, Flameproof, Dust Ignition Proof	
	INMETRO	Flameproof, Dust Ignition Proof	
	WHG	Overfill protection	

		Electronic module Standard	Electronic module Digital
Electronics	Supply voltage	12 .. 250 V AC/ DC (0 .. 60 Hz)	12 .. 30 V DC (24 V for IS version)
	Signal output	Relais SPDT Solid-state switch (30 V DC or AC peak, 82 mA)	Profibus PA Solid-state switch (30 V DC or AC peak, 82 mA)
	Signal output delay	Rise time or Fall time 1 .. 60 sec.	Rise time 0 .. 100 sec. Fall time 0 .. 100 sec.
	Failsafe	High or Low	High or Low
	User interface	Potentiometer, switches, 3 LED indicator	LCD local user interface or Profibus PA
	Diagnostics	-	Over and Under Range Electronics temperature Function check Maintenance alarm Internal electronic self check

Housing	Material of housing	Aluminium, powder-coated	
	Ingress protection	Type 4/ NEMA 4/ IP68	
	Material of Temperature extended shaft	1.4404 (SS316L), option	
	Ambient temperature	-40 .. 85°C (-40 .. 185°F) With ATEX approval: -40 .. 80°C (-40 .. 176°F) with Flameproof or Dust Ignition Proof or Type of protection n -40 .. 60°C (-40 .. 140°F) with Intrinsically safe	


Overview

Mechanics and Process	Length of extension "L"	Short extension threaded Short extension flanged/ Triclamp Pipe extension Cable extension	120 .. 5,500 mm (4.72 .. 216.5") 98 .. 5,500 mm (3.86 .. 216.5") 210 .. 5,500 mm (8.27 .. 216.5") 500 .. 30,000 mm (19.69 .. 1,181")
	Diameter of pipe/ cable extension	Pipe extension Cable	ø20 mm (ø0.79") ø6 mm (ø0.3")
	Materials	Process connection Pipe extension Cable insulation Probe (sensor) Wetted seals	1.4404 (SS316L) 1.4404 (SS316L) FEP PPS or PVDF, FDA and 1935/2004/EC conform FKM or FFKM
	Process temperature	Without temp. extended shaft With temp. extended shaft	-40 .. 85°C (-40 .. 185°F) -40 .. 125°C (-40 .. 257°F)
	Process pressure*	Pipe version Cable/ sliding coupling	-1 .. 25 bar g (-14.6 .. 365 psi g) nominal -1 .. 10 bar g (-14.6 .. 150 psi g) nominal *Observe Pressure versus Temperature Curves
	Tensile load (cable version)	max. 1,750 N	

Short extension
length



Pipe version
extended

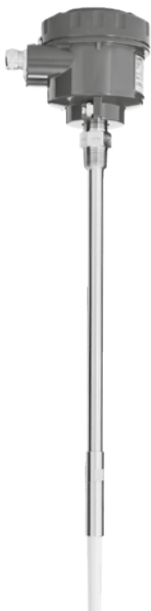


Cable version



Remote version



CN 8100

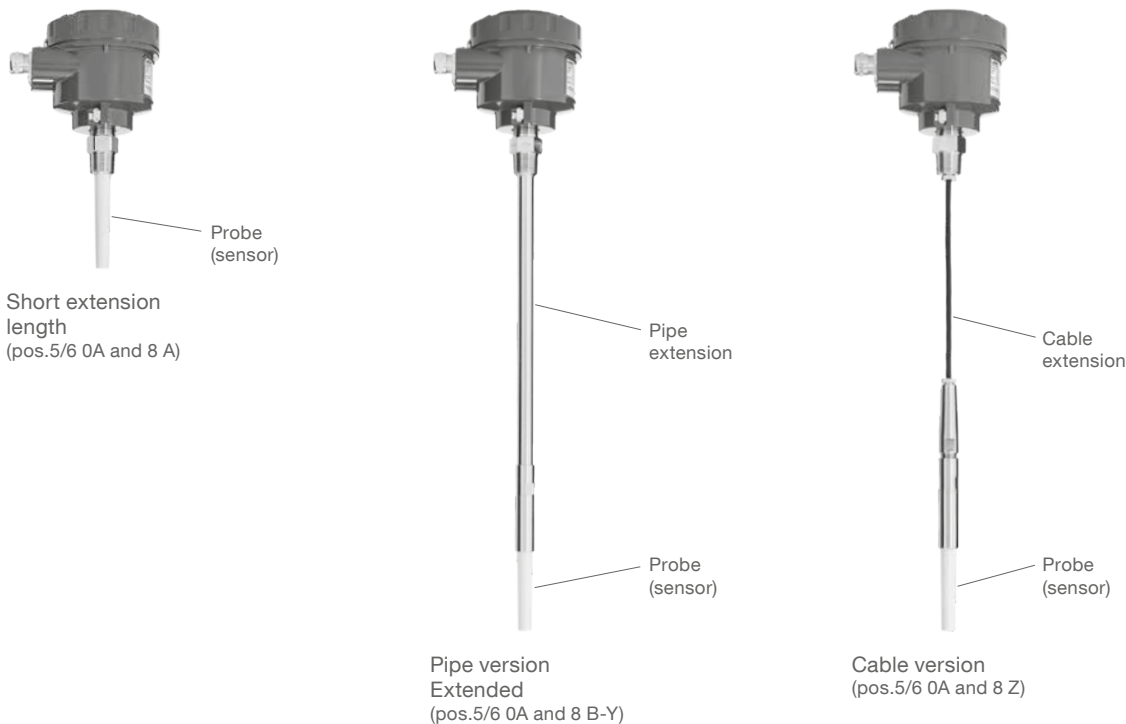

Dimensions see pages 9 - 11

Cable entries (by default)
Depending on model selected, the following cable entries are supported (options see pos.33 on page 7):

Version:	Cable entries:
Flameproof (pos.2 T,D)	M20 x 1.5 (1x open conduit + 1x Ex-d blind plug)
FM/ CSA (pos.2 M,H,U,P,N)	NPT 1/2" tapered ANSI B1.20.1 (1x open conduit + 1x Ex-d blind plug)
All other versions	M20 x 1.5 (1x screwed cable gland + 1x blind plug)

CN 8100

Basic type

CN 8100

pos.2

Certificate (detailed Ex-markings: see page 12)

	Gas	Dust	Protection method
0	CE	-	-
Q	CE/ FM/ CSA ⁽¹⁾	-	General purpose
G	ATEX	Zone 2	Type of protection n
T	ATEX ⁽²⁾	Zone 0/1	Flameproof, Dust Ignition Proof
Y	ATEX ^(2, 6)	Zone 0	Intrinsically Safe
W	ATEX ⁽²⁾	-	Dust Ignition Proof
M	FM/ CSA	-	General purpose
H	FM/ CSA	Cl. I Div. 2	Non incensive
U	FM/ CSA	Cl. I Div. 1	Explosion Proof, Dust Ignition Proof
P	FM/ CSA ⁽⁶⁾	Cl. I Div. 1	Intrinsically Safe
N	FM/ CSA	-	Dust Ignition Proof
D	INMETRO	Zone 1	Flameproof, Dust Ignition Proof

pos.3

Temperature extended shaft

1	without
2	with

pos.4

Electronic module

E	Standard: Relay SPDT/ Solid State	12 ... 250 V AC/ DC ⁽⁷⁾
F	Digital: Profibus PA/ Solid State	12 ... 30 V DC (24 V intrinsic safe) LCD display

pos.5+6

Process connection

0A	Thread ¾" NPT	taper, ANSI/ ASME B1.20.1
0B	Thread 1" NPT	taper, ANSI/ ASME B1.20.1
0C	Thread 1¼" NPT	taper, ANSI/ ASME B1.20.1
0D	Thread 1½" NPT	taper, ANSI/ ASME B1.20.1
1A	Thread R ¾"	BSPT, EN 10226/ PT (JIS-T), JIS B 0203
1B	Thread R 1"	BSPT, EN 10226/ PT (JIS-T), JIS B 0203
1D	Thread R 1½"	BSPT, EN 10226/ PT (JIS-T), JIS B 0203
3A	Thread G ¾"	BSPP, EN ISO 228-1/ PF (JIS-P), JIS B 0202
3B	Thread G 1"	BSPP, EN ISO 228-1/ PF (JIS-P), JIS B 0202
3D	Thread G 1½"	BSPP, EN ISO 228-1/ PF (JIS-P), JIS B 0202
5A	Flange 1"	150 lbs ASME B16.5, raised face
5B	Flange 1"	300 lbs ASME B16.5, raised face
5C	Flange 1"	600 lbs ASME B16.5, raised face
5D	Flange 1½"	150 lbs ASME B16.5, raised face
5E	Flange 1½"	300 lbs ASME B16.5, raised face
5F	Flange 1½"	600 lbs ASME B16.5, raised face
5G	Flange 2"	150 lbs ASME B16.5, raised face
5H	Flange 2"	300 lbs ASME B16.5, raised face
5J	Flange 2"	600 lbs ASME B16.5, raised face
5K	Flange 3"	150 lbs ASME B16.5, raised face
5L	Flange 3"	300 lbs ASME B16.5, raised face
5M	Flange 3"	600 lbs ASME B16.5, raised face
5N	Flange 4"	150 lbs ASME B16.5, raised face
5P	Flange 4"	300 lbs ASME B16.5, raised face
5Q	Flange 4"	600 lbs ASME B16.5, raised face
6A	Flange DN25, PN16	EN 1092-1 type A flat faced
6B	Flange DN25, PN40	EN 1092-1 type A flat faced
6C	Flange DN40, PN16	EN 1092-1 type A flat faced
6D	Flange DN40, PN40	EN 1092-1 type A flat faced
6E	Flange DN50, PN16	EN 1092-1 type A flat faced
6F	Flange DN50, PN40	EN 1092-1 type A flat faced
6G	Flange DN80, PN16	EN 1092-1 type A flat faced
6H	Flange DN80, PN40	EN 1092-1 type A flat faced
6J	Flange DN100, PN16	EN 1092-1 type A flat faced
6K	Flange DN100, PN40	EN 1092-1 type A flat faced
8A	Triclamp 1"	ISO2852 ⁽⁹⁾
8B	Triclamp 1½"	ISO2852 ⁽⁹⁾
8C	Triclamp 2"	ISO2852 ⁽⁹⁾
8D	Triclamp 2½"	ISO2852 ⁽⁹⁾
8E	Triclamp 3"	ISO2852 ⁽⁹⁾

CN 8100

pos.8	Lenght of extension "L"		
A	Short extension length, 120 mm (4.72") threaded/ 98 mm (3.86") flanged or Triclamp		•
B	Pipe, 250 mm (9.84")		•
C	Pipe, 350 mm (13.78")		•
D	Pipe, 500 mm (19.69")		•
E	Pipe, 750 mm (29.53")		•
F	Pipe, 1,000 mm (39.37")		•
G	Pipe, 1,250 mm (49.21")		•
H	Pipe, 1,350 mm (53.15")		•
J	Pipe, 1,500 mm (59.06")		•
K	Pipe, 1,750 mm (68.90")		•
L	Pipe, 2,000 mm (78.74")		•
Y	Pipe, "L"= customer specified		
	Base price		•
	Price per 100 mm (3.94") of part thereof (starting from 0 mm)		•
	min. 210 mm (8.3"), max. 5,500 mm (216.5")		
P	Cable, 3,000 mm (118.11"), length can be shortened by customer, probe side not assembled		•
Q	Cable, 6,000 mm (236.22"), length can be shortened by customer, probe side not assembled		•
Z	Cable, "L"= customer specified		
	Base price		•
	Price per 100 mm (3.94") of part thereof (starting from 0 mm)		•
	min. 500 mm (19.46"), max. 30,000 mm (1,181")		
pos.9	Material of process connection and extension "L"		
2	Stainless steel 1.4404 (316L), FEP jacketed cable with cable version		•
pos.10	Material of probe (sensor)		
A	PPS		•
B	PVDF		•

Further options: see page 7

- (1) Included is: TR-CU (Ordinary Locations)
 (2) Included is: TR-CU
 (6) Intrinsically safe barrier required
 (7) Not available in combination with Intrinsically safe pos.2 Y,P, type of protection n/ non incensive pos.2 G,H
 (9) Available with pipe version pos.8 A-L, Y

CN 8100	A				1		2	
Position	1	2	3	4	5+6	7	8	9

L =	mm
-----	----

← Order code

All positions are available with special design (use code "Z").

Options

pos.11 x	Guarantee extension to 5 years	•
	Remote version ⁽¹⁾	
pos.12 a	2 m remote cable (both sides wired), including mounting bracket	•
pos.12 b	5 m remote cable (both sides wired), including mounting bracket	•
pos.17 x	FFKM wetted seals ⁽²⁾	•
pos.19 x	Sliding coupling ⁽³⁾	•
pos.23 x	WHG approval ⁽⁴⁾	•
pos.24 x	Functional safety SIL 2 (IEC 61508) ⁽⁵⁾	•
	Overspill, Declaration of Conformity	
pos.25 x	Inspection certificate	•
	Type 3.1 (EN 10204)	
pos.26 x	Manufacturer's Test Certificate	•
	M to DIN 55350, Part 18 and to ISO 9000	
pos.30 x	Stainless steel tag	•
	Measuring point number/ identification (max. 27 characters)	
	Cable entry	
	Selection of the following options only necessary, if a deviation from default is required:	
pos.33 x	M20 x 1.5 2x screwed cable gland ⁽⁶⁾	•
pos.33 e	M20 x 1.5 1x screwed cable gland + 1x blind plug ⁽⁷⁾	•
pos.33 a	NPT ½" tapered ANSI B1.20.1 (1x conduit + 1x Ex-d blind plug) ⁽⁸⁾	•
	Signal lamp ⁽⁹⁾	
pos.34 a	Bulb, mounted in cable entry M20 x 1.5, 2 W green	•
pos.34 b	Bulb, mounted in cable entry M20 x 1.5, 2 W red	•
	Plug ⁽¹⁰⁾	
pos.35 x	Valve connector (incl. mating plug) 4-pole (incl. PE) max. 230 V	•
pos.35 a	M12 (without mating plug) 4-pole max. 25 V	•
pos.35 b	M12 (without mating plug) 5-pole (incl. PE) max. 60 V	•
pos.35 c	Harting Han 4A (incl. mating plug) 5-pole (incl. PE) max. 230 V	•
pos.36 x	Glass window in lid ⁽¹¹⁾	•

(1) Dimensions see page 11.

(2) Process temperature limited to -20°C (-4°F). For sealing of cable (cable version pos.8 P,Q,Z) and sealing of sliding coupling (pos.19 x) as well PTFE sealings are used.

(3) Available with pipe version with min. length of extension L=350 mm (pos.8 C-Y), and process connection thread (pos.5+6 0A-3D). Dimensions see page 11.

(4) Available with certificate CE (pos.2 0, Q) or ATEX flameproof (pos.2 T). Only with electronic module standard (pos.4 E).

(5) Available with electronic module standard (pos.4 E).

(6) Available for all versions except flameproof/ explosion proof version (pos.2 T,U,D).

(7) Available for FM/ CSA version (pos.2 M,H,P,N) except explosion proof version (pos.2 U).

(8) Available for all versions except FM/ CSA (pos.2 M,H,U,P,N).


(9) Available for CE (pos.2 0) and electronic module standard (pos.4 E). Not in combination with cable entries pos.33 x.

Three bulbs (24 V, 115 V and 230 V) will be delivered. Connection of bulb wires to internal terminals according to customer specification.

(10) Available for CE (pos.2 0). Not in combination with cable entries pos.33 x,e,a. Connection of plug wires to internal terminals according to customer specification.

(11) Available for electronic module digital (pos.4 F).


Options/ Accessories

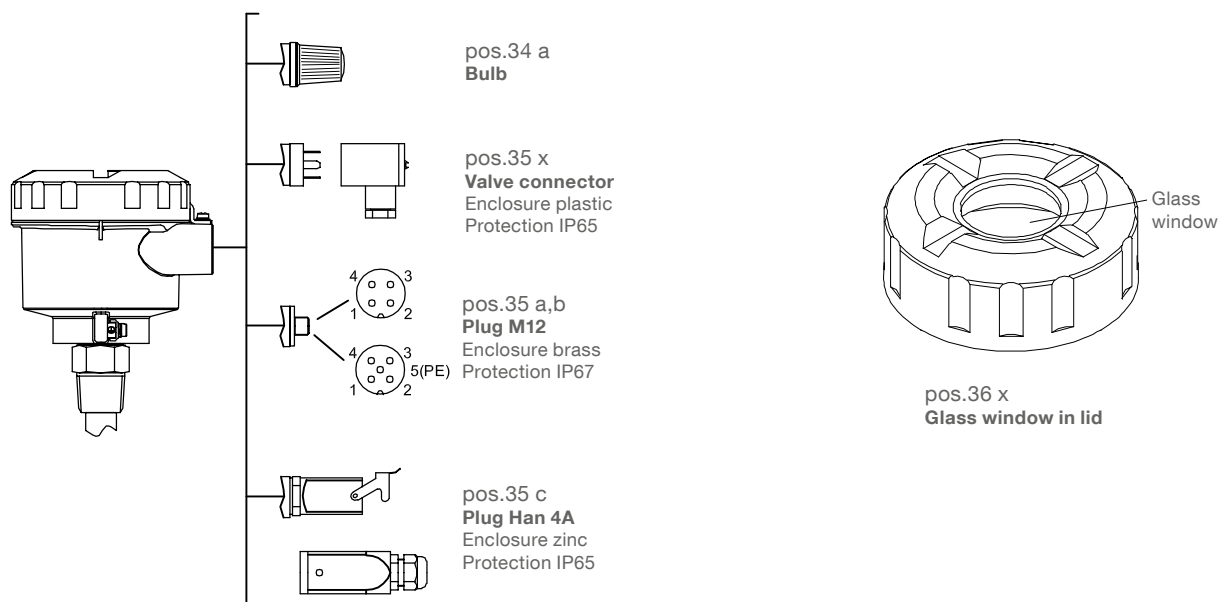


Accessories

Minimum order value for spare parts or accessories is 75 €.

cl440102	Sensguard	process connection ¾" NPT (PPS) ⁽¹⁾	
cl440103	Sensguard	process connection 1" BSPT (PPS) ⁽¹⁾	
em440041	Cable gland	M20 x 1.5 Ex-d	

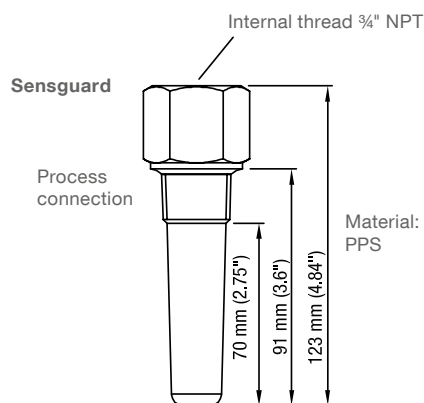

Cable gland M20 x 1.5 Ex-d



For use with version
ATEX flameproof (pos.2 T).
Type: Stahl T3CDS 246560

(1) Requires unit with process
connection ¾" NPT (pos.5+6 0A).



Dimensions

Enclosure



Top view

M20 x 1.5 cable gland



NPT ½" conduit





Threaded process connection

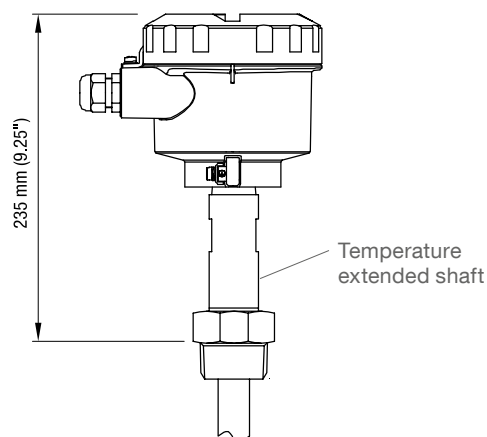

Flanged process connection

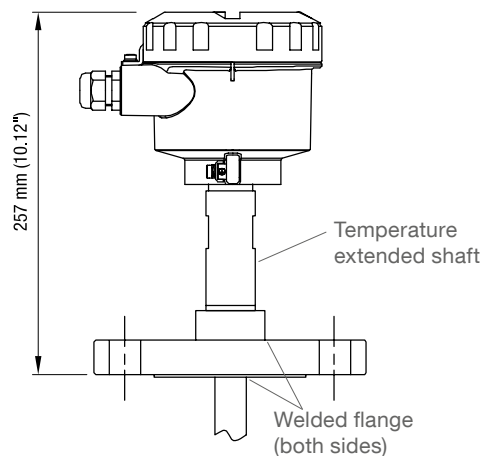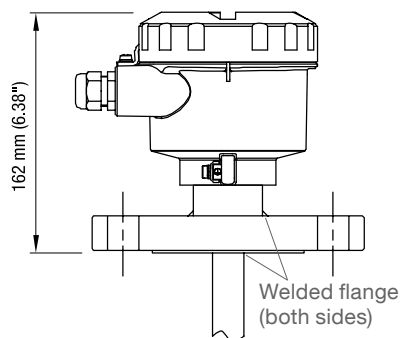


Triclamp process connection

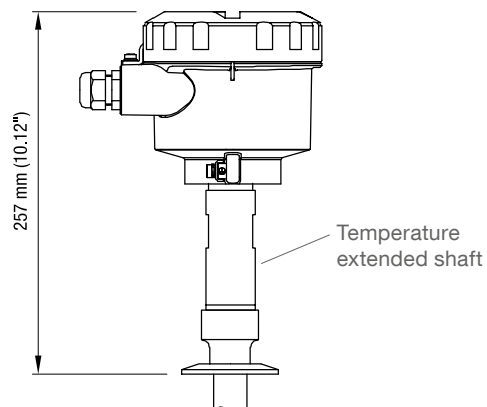


Dimensions

Short extension length Shortest length


Threaded process connection



Flanged process connection




Triclamp process connection




Pipe version Extended


Threaded process connection

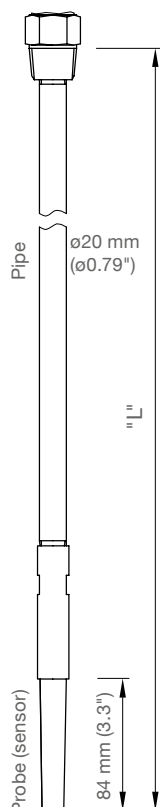



Flanged process connection



Triclamp process connection




Pipe version Extended, with sliding coupling (pos.19)

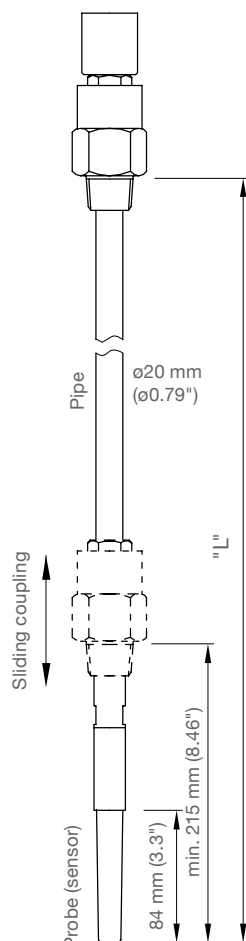


"L" does not include any raised face (see page 11)

Cable version

Threaded process connection

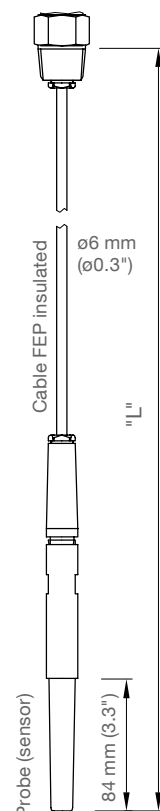


Flanged process connection




Dimensions

Remote version (pos.12 a,b)

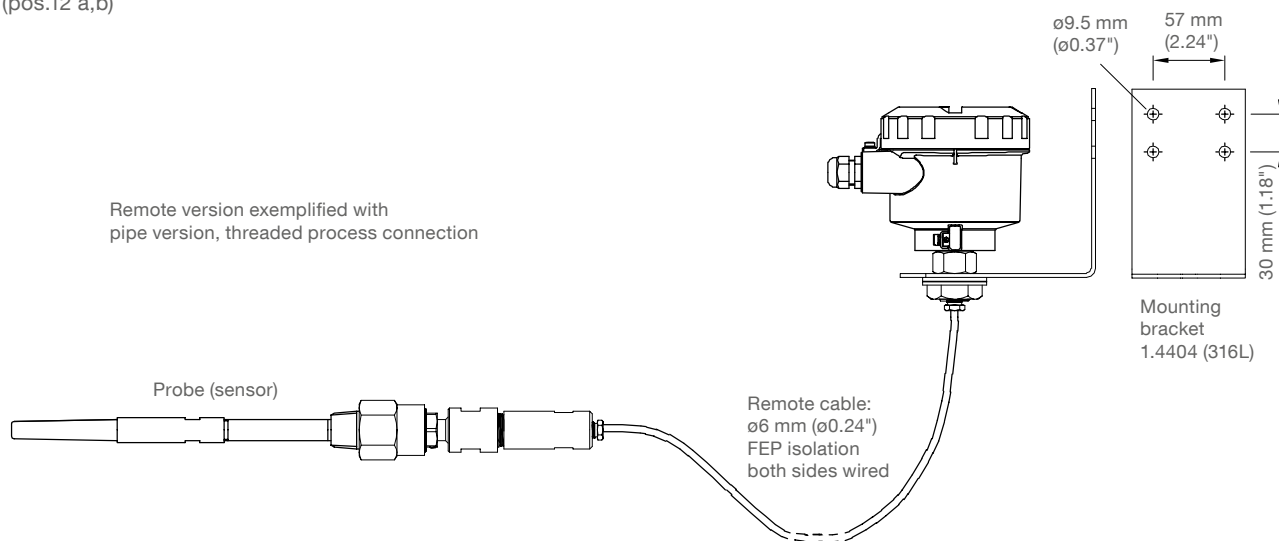


Flanges

	Code	Type	Number of holes	d2 mm (inch)	Lk mm (inch)	D mm (inch)	T thickness mm (inch)
ASME B16.5, raised face	5A	1" 150 lbs	4	15.9 (0.63)	79.3 (3.12)	108.0 (4.25)	14.3 (0.56)
	5B	1" 300 lbs	4	19.1 (0.75)	88.9 (3.5)	123.8 (4.87)	17.5 (0.69)
	5C	1" 600 lbs	4	19.1 (0.75)	88.9 (3.5)	123.8 (4.87)	17.5 (0.69)
	5D	1½" 150 lbs	4	15.9 (0.63)	98.6 (3.88)	127.0 (5.0)	17.5 (0.69)
	5E	1½" 300 lbs	4	22.2 (0.87)	114.3 (4.5)	155.6 (6.13)	20.6 (0.81)
	5F	1½" 600 lbs	4	22.2 (0.87)	114.3 (4.5)	155.6 (6.13)	22.4 (0.88)
	5G	2" 150 lbs	4	19.1 (0.75)	120.7 (4.75)	152.4 (6.01)	19.1 (0.75)
	5H	2" 300 lbs	8	19.1 (0.75)	127.0 (5.0)	165.1 (6.5)	22.2 (0.87)
	5J	2" 600 lbs	8	19.1 (0.75)	127.0 (5.0)	165.1 (6.5)	25.4 (1.0)
	5K	3" 150 lbs	4	19.1 (0.75)	152.4 (6.01)	190.5 (7.5)	23.9 (0.94)
	5L	3" 300 lbs	8	22.2 (0.87)	168.2 (6.62)	209.6 (8.25)	28.6 (1.13)
	5M	3" 600 lbs	8	22.2 (0.87)	168.2 (6.62)	209.6 (8.25)	31.7 (1.25)
	5N	4" 150 lbs	8	19.1 (0.75)	190.5 (7.5)	228.6 (9.0)	23.9 (0.94)
EN 1092-1 type A, flat faced	5P	4" 300 lbs	8	22.2 (0.87)	200.0 (7.87)	254.0 (10.0)	31.7 (1.25)
	5Q	4" 600 lbs	8	25.4 (1.0)	215.9 (8.5)	273.1 (10.75)	38.1 (1.5)
	6A	DN25 PN16	4	14.0 (0.55)	85.0 (3.35)	115.0 (4.53)	18.0 (0.71)
	6B	DN25 PN40	4	14.0 (0.55)	85.0 (3.35)	115.0 (4.53)	18.0 (0.71)
	6C	DN40 PN16	4	18.0 (0.71)	110.0 (4.33)	150.0 (5.91)	18.0 (0.71)
	6D	DN40 PN40	4	18.0 (0.71)	110.0 (4.33)	150.0 (5.91)	18.0 (0.71)
	6E	DN50 PN16	4	18.0 (0.71)	125.0 (4.92)	165.0 (6.5)	18.0 (0.71)
	6F	DN50 PN40	4	18.0 (0.71)	125.0 (4.92)	165.0 (6.5)	20.0 (0.79)
	6G	DN80 PN16	8	18.0 (0.71)	160.0 (6.3)	200.0 (7.87)	20.0 (0.79)
	6H	DN80 PN40	8	18.0 (0.71)	160.0 (6.3)	200.0 (7.87)	24.0 (0.94)
	6J	DN100 PN16	8	18.0 (0.71)	180.0 (7.09)	220.0 (8.66)	20.0 (0.79)
	6K	DN100 PN40	8	22.0 (0.87)	190.0 (7.48)	235.0 (9.25)	24.0 (0.94)



Raised face



Type	Facing thickness
ASME 150 lbs ASME 300 lbs	2 mm (0.08")
ASME 600 lbs	7 mm (0.28")

Detailed Ex-markings

pos.2	Certificate		Protection method
G	ATEX II 3G	Ex nA II T6...T4 Gc	Type of protection n
T	ATEX II 1/2G ATEX II 1/2D	Ex db [ia] IIC T6...T4 Ga/Gb Ex ia/tb IIIC T ₂₀₀ ⚠ Da/Db	Flameproof, Dust Ignition Proof
Y	ATEX II 1G ATEX II 1/2D	Ex ia IIC T6...T4 Ga Ex ia IIIC T ₂₀₀ ⚠ Da/Db	Intrinsically Safe
W	ATEX II 1/2D	Ex ia/tb IIIC T ₂₀₀ ⚠ Da/Db	Dust Ignition Proof
H	FM/ CSA	NI Class I, Div.2, Gr. A, B, C, D Class II, Div.2, Gr. F, G Class III T4 or T6	Non incendive
U	FM/ CSA	XP-AIS Class I, Div.1, Gr. A, B, C, D DIP-AIS Class II, Div.1, Gr. E, F, G DIP-AIS Class III T4	Explosion Proof, Dust Ignition Proof
P	FM/ CSA	IS Class I, Div.1, Gr. A, B, C, D IS Class II, Div.1, Gr. E, F, G IS Class III T4	Intrinsically Safe
N	FM/ CSA	DIP-AIS Class II, Div.1, Gr. E, F, G DIP-AIS Class III T4	Dust Ignition Proof
D	INMETRO	Ex d [ia Ga] IIC T6...T4 Gb Ex tb IIIC T85°C...T100°C Db IP65/IP68	Flameproof, Dust Ignition Proof

Deviation in Ex-markings with Remote version (pos.12 a,b)

pos.2	Certificate electronic housing		Certificate probe (sensor)		Protection method
T	ATEX II 2(1)G ATEX II 2(1)D	Ex db [ia] IIC T6...T4 Gb Ex tb [ia] IIIC T ₂₀₀ ⚠ Db	ATEX II 1G ATEX II 1D ATEX II 1/2D	Ex ia IIC T6...T4 Ga Ex ia IIIC T ₂₀₀ ⚠ Da Ex ia IIIC T ₂₀₀ ⚠ Da/Db	Flameproof, Dust Ignition Proof
Y	ATEX II 1G ATEX II 2D	Ex ia IIC T6...T4 Ga Ex ia IIIC T ₂₀₀ ⚠ Db	ATEX II 1G ATEX II 1D ATEX II 1/2D	Ex ia IIC T6...T4 Ga Ex ia IIIC T ₂₀₀ ⚠ Da Ex ia IIIC T ₂₀₀ ⚠ Da/Db	Intrinsically Safe
W	ATEX II 2(1)D	Ex tb [ia] IIIC T ₂₀₀ ⚠ Db	ATEX II 1D ATEX II 1/2D	Ex ia IIIC T ₂₀₀ ⚠ Da Ex ia IIIC T ₂₀₀ ⚠ Da/Db	Dust Ignition Proof
D	INMETRO	Ex d [ia Ga] IIC T6 Gb Ex tb IIIC T85°C...T100°C Db IP65/IP68	INMETRO	Ex ia IIC T6 ... T4 Ga Ex tb IIIC T85°C...T100°C Db IP65/IP68	Flameproof, Dust Ignition Proof

Electrical installation

Standard

Relay SPDT/
 Solid state switch


Power supply:

12 .. 250 V AC/ DC (0 .. 60 Hz)
 2 W max.

Signal output:

Relay:
 Floating relay SPDT
 AC max. 250 V, 8 A, 2000 VA, non inductive
 DC max. 30 V, 5 A, 150 W, non inductive

Solid state switch:
 30 V DC or 30 V AC (peak), 82 mA
 Observe protection (see below)

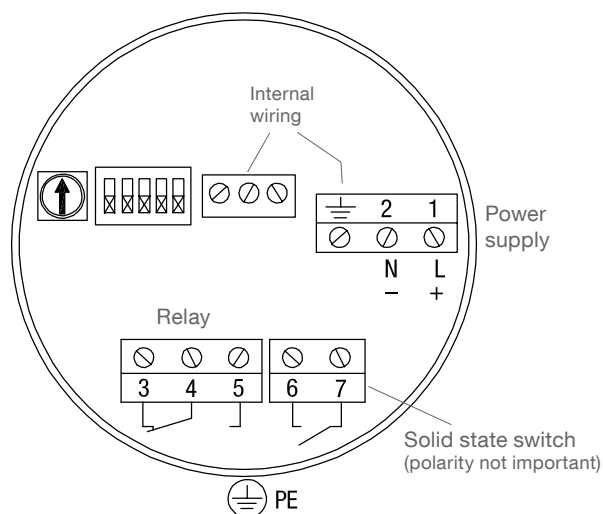

Digital

Profibus PA/
 Solid state switch

Power supply:


12 .. 30 V DC, 12.5 mA

Intrinsically Safe:
 12 .. 24 V DC, 12.5 mA
 Intrinsically safe barrier required
 For ATEX:
 $U_i=24\text{ V}$, $I_i=380\text{ mA}$, $P_i=5.32\text{ W}$, $C_i=5\text{ nF}$, $L_i=10\text{ uH}$
 For FM/ CSA:
 See "Connection drawing" in the
 Instruction Manual

Signal output:

Solid state switch:
 30 V DC or 30 V AC (peak), 82 mA
 Observe protection (see below)


Intrinsically safe:
 Intrinsically safe barrier required
 For ATEX:
 $U_i=30\text{ V}$, $I_i=200\text{ mA}$, $P_i=350\text{ mW}$, $C_i=0$, $L_i=0$
 For FM/ CSA:
 See "Connection drawing" in the Instruction Manual

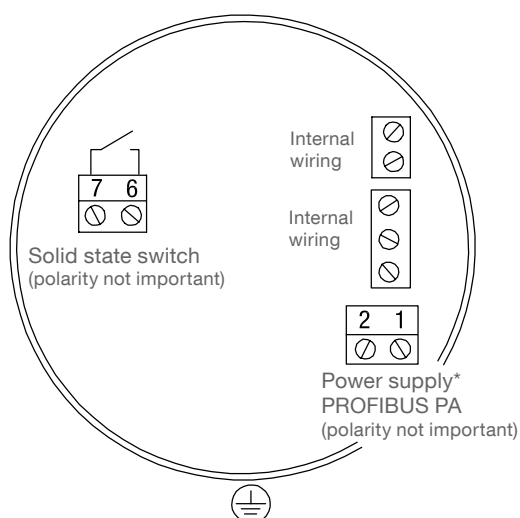

* With use of Profibus the wiring must be according to Profibus PA standards.
 If Profibus is not used, a shielded cable is recommended to ensure stable measurement.

Protection of Solid State Switch

Observe a protection diode in case of connecting an external relay to the Solid state switch



Spare parts

Minimum order value for spare parts or accessories is 75 €.

Fitting to unit/ model code	Spare part Article number
--------------------------------	------------------------------

Electronics

Split electronics is present inside probe and inside housing. Please contact manufacturer.		
---	--	--

Sensor kit for cable units

Fitting to:	Standard electronic	PPS probe	FKM sealing	pos.4 E 8 P,Q,Z 10 A	pl440100	•
Fitting to:	Standard electronic	PVDF probe	FKM sealing	pos.4 E 8 P,Q,Z 10 B	pl440110	•
Fitting to:	Standard electronic	PPS probe	FFKM sealing	pos.4 E 8 P,Q,Z 10 A 17 x	pl440120	•
Fitting to:	Standard electronic	PVDF probe	FFKM sealing	pos.4 E 8 P,Q,Z 10 B 17 x	pl440130	•
Fitting to:	Digital electronic	PPS probe	FKM sealing	pos.4 F 8 P,Q,Z 10 A	pl440140	•
Fitting to:	Digital electronic	PVDF probe	FKM sealing	pos.4 F 8 P,Q,Z 10 B	pl440150	•
Fitting to:	Digital electronic	PPS probe	FFKM sealing	pos.4 F 8 P,Q,Z 10 A 17 x	pl440160	•
Fitting to:	Digital electronic	PVDF probe	FFKM sealing	pos.4 F 8 P,Q,Z 10 B 17 x	pl440170	•

